

FIG. 1 is a schematic diagram of a system 100 for providing a service to a user device 102. The system 100 includes a network 104, a server 106, and a database 108. The network 104 is configured to communicate with the user device 102 and the server 106. The server 106 is configured to access the database 108 and provide data to the user device 102. The database 108 is configured to store data for the server 106. The system 100 is configured to provide a service to the user device 102 based on the data stored in the database 108.

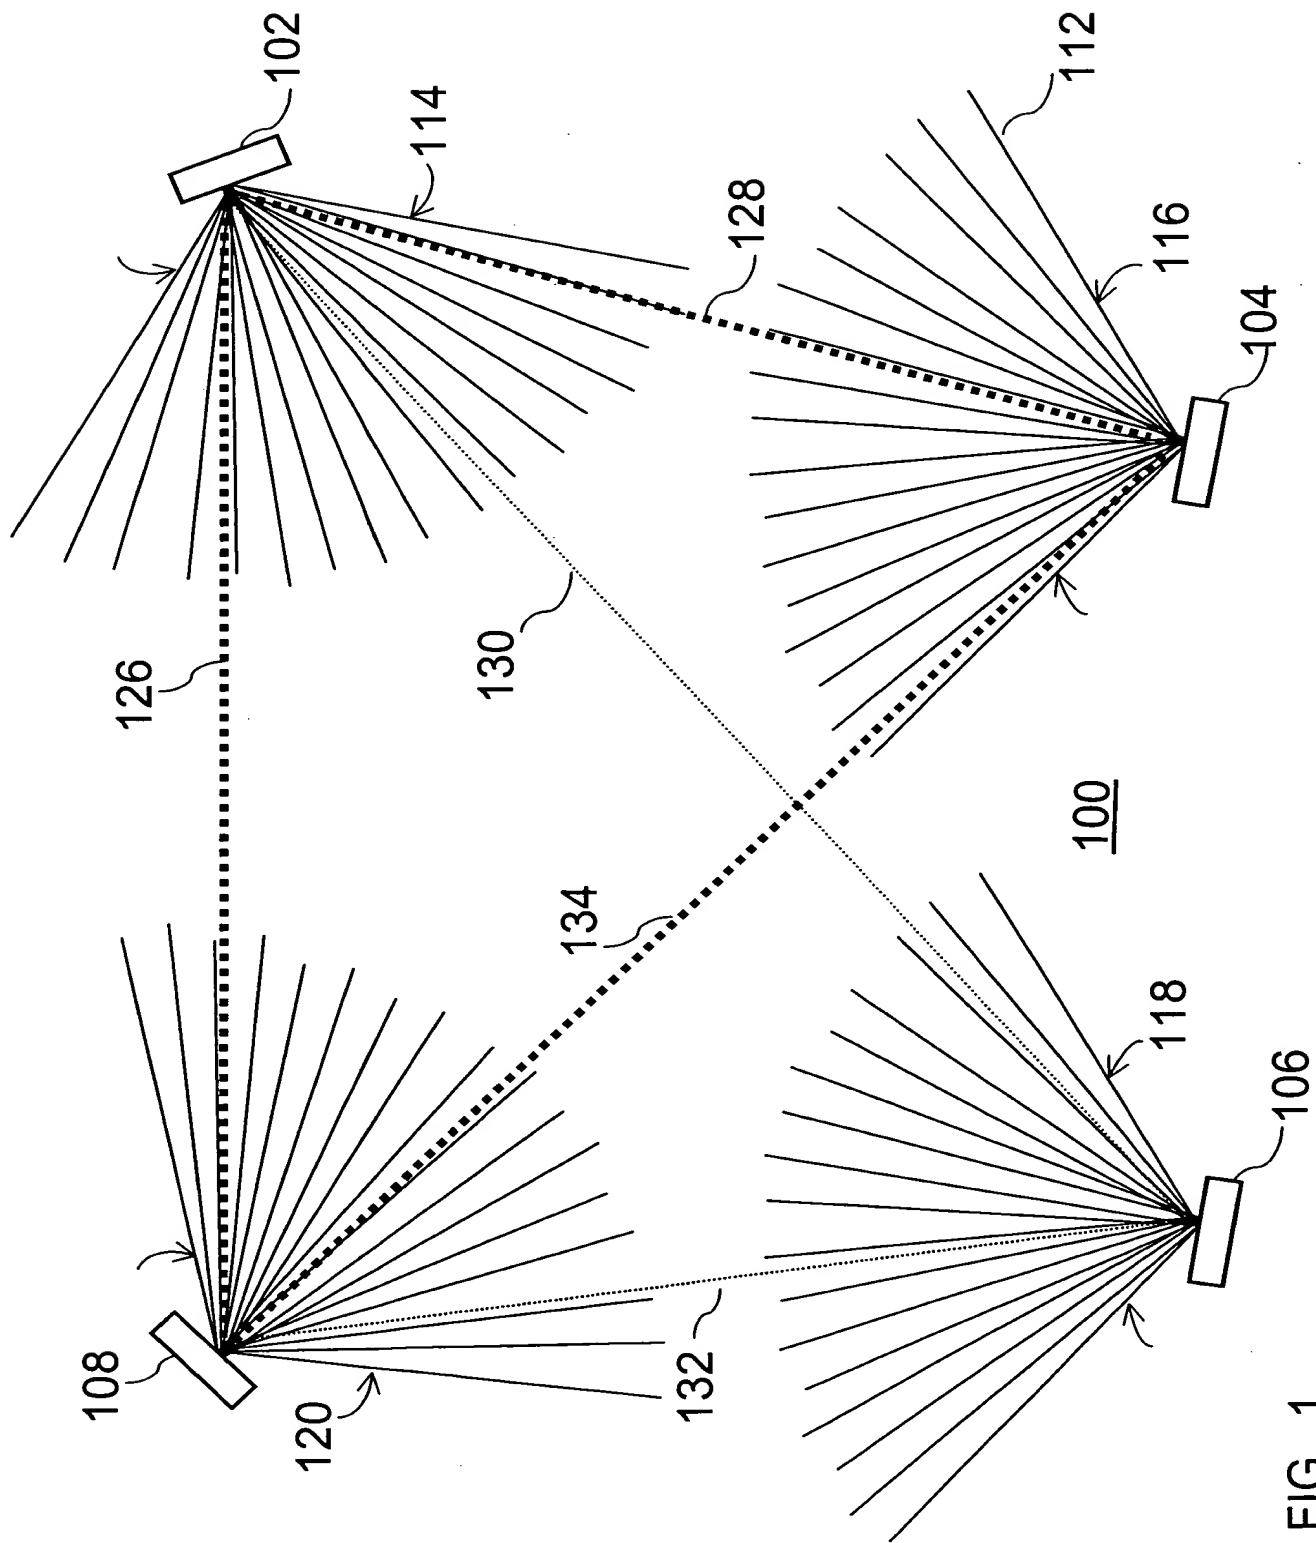


FIG. 1

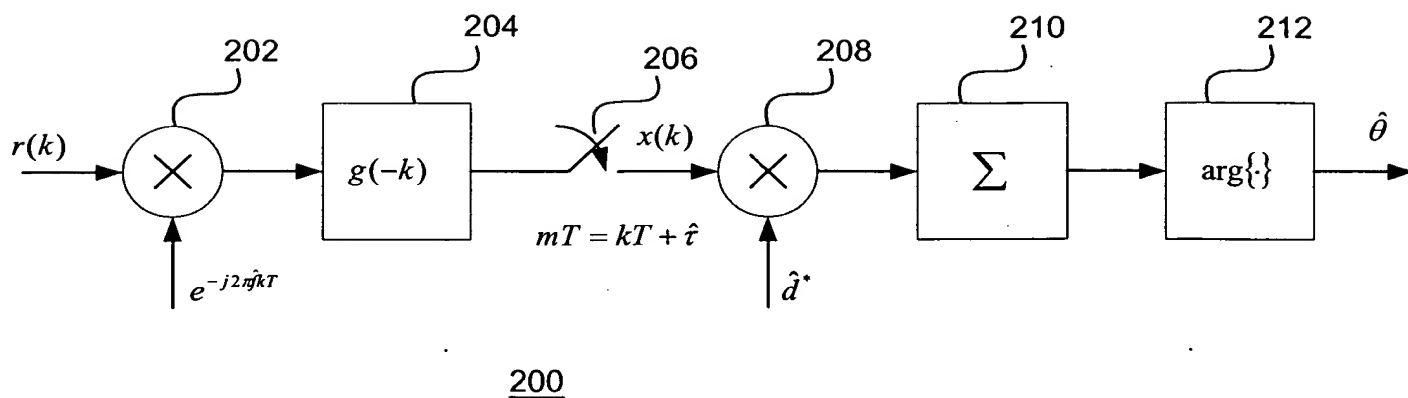


FIG. 2 (PRIOR ART)

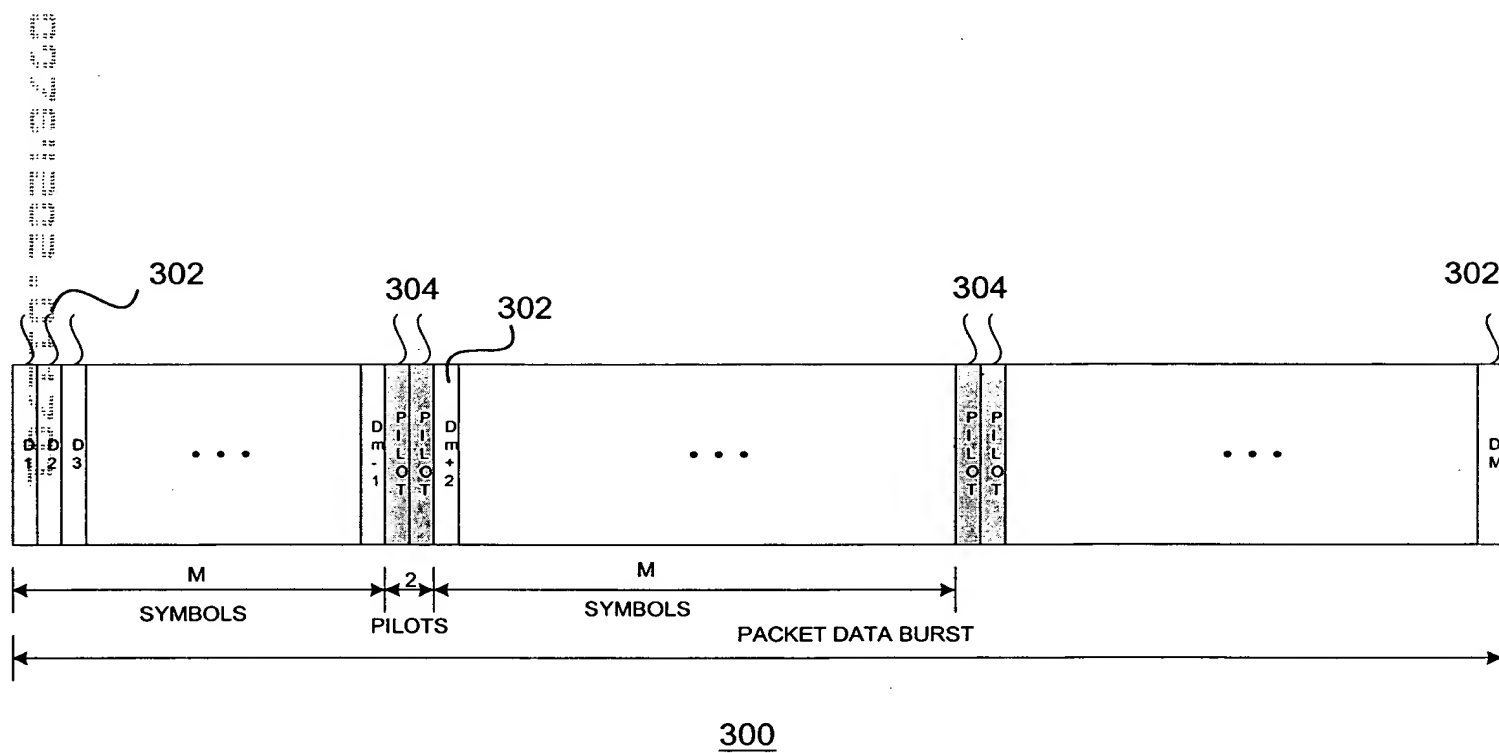


FIG. 3

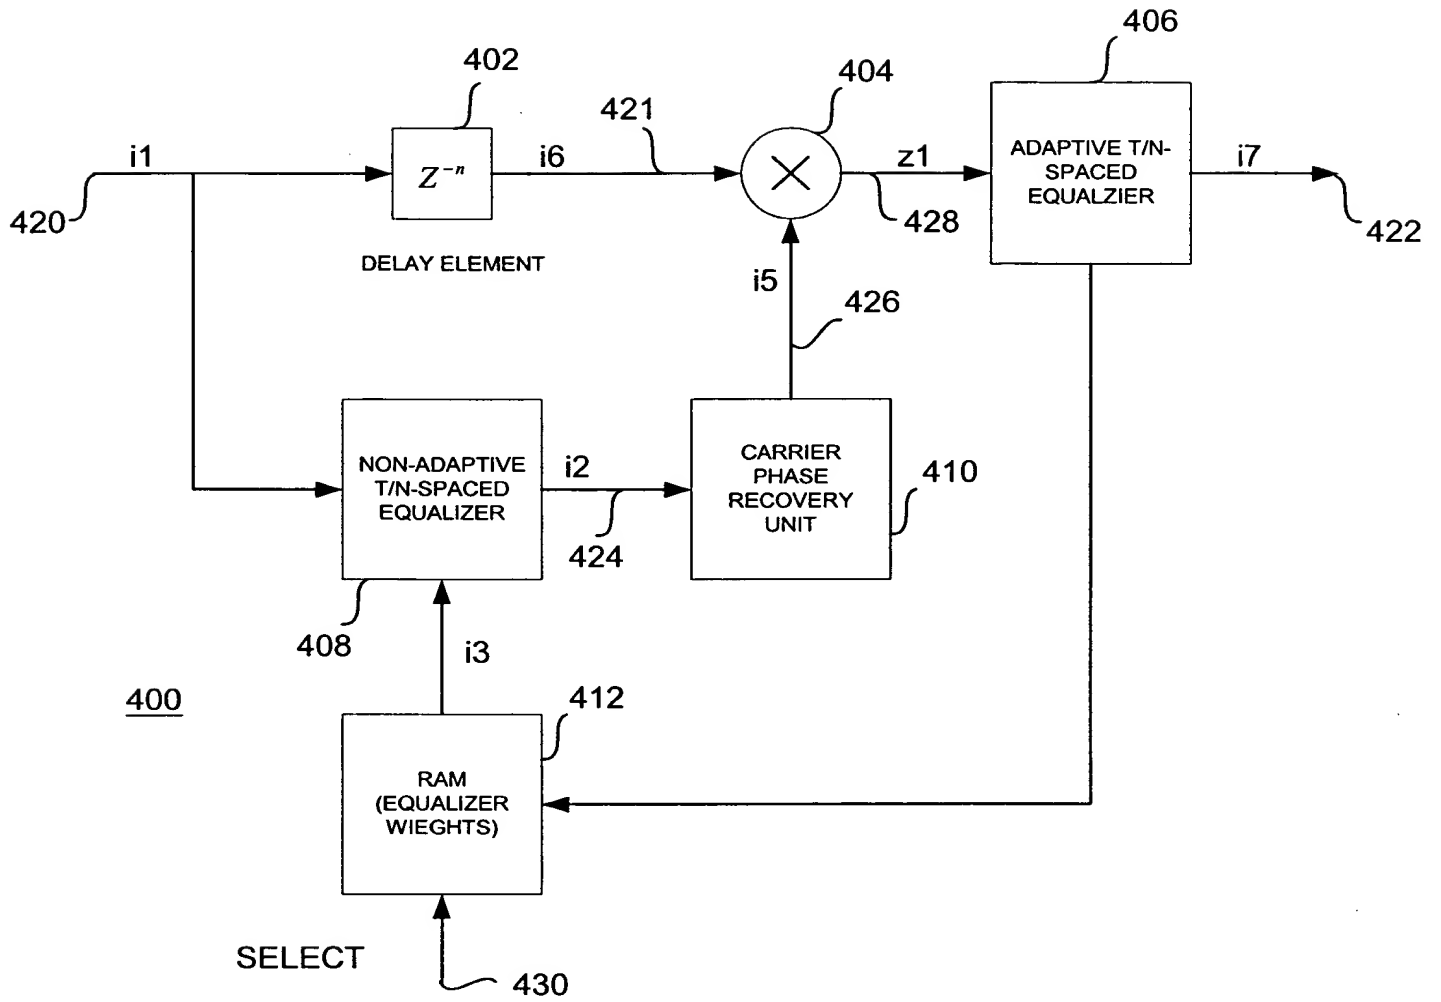


FIG. 4

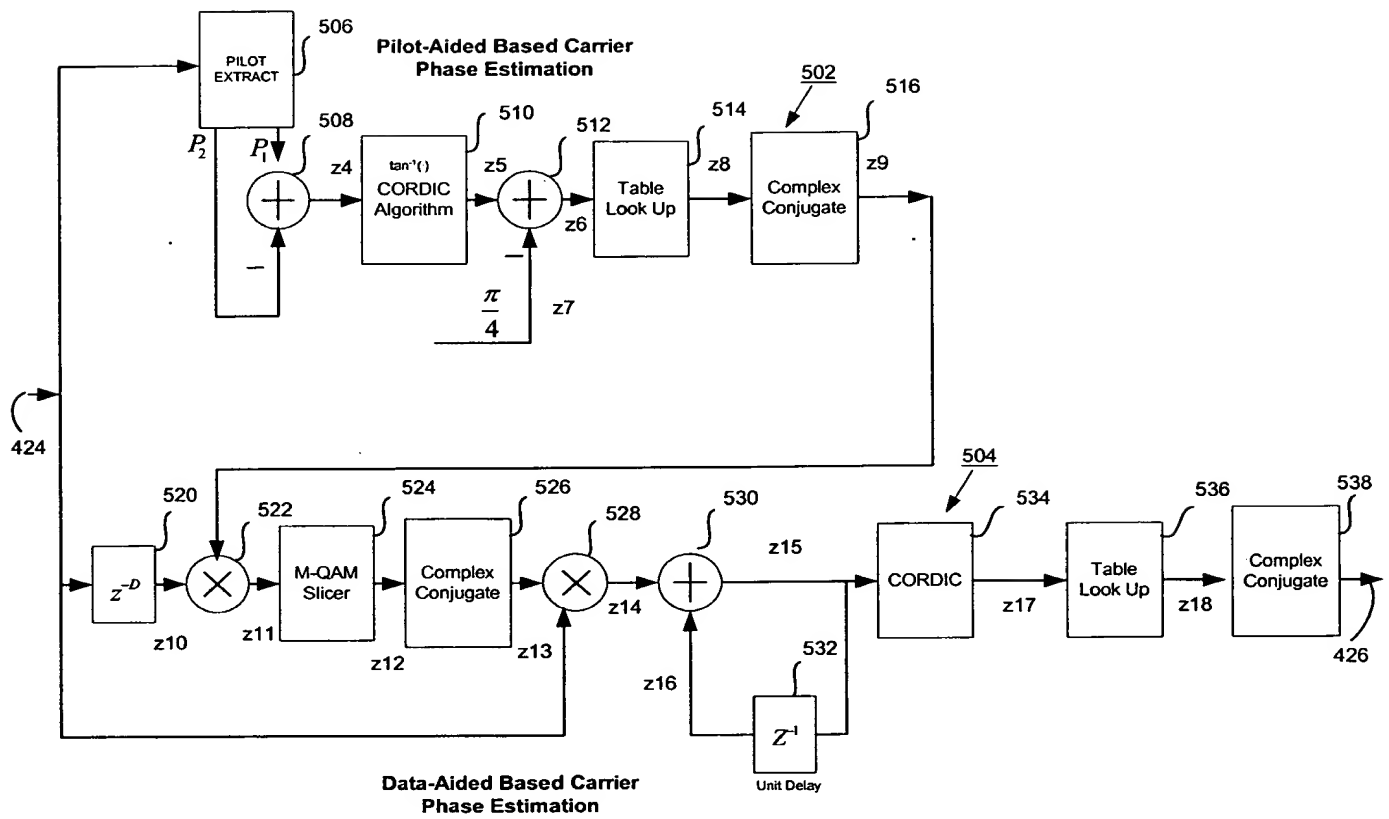


FIG. 5


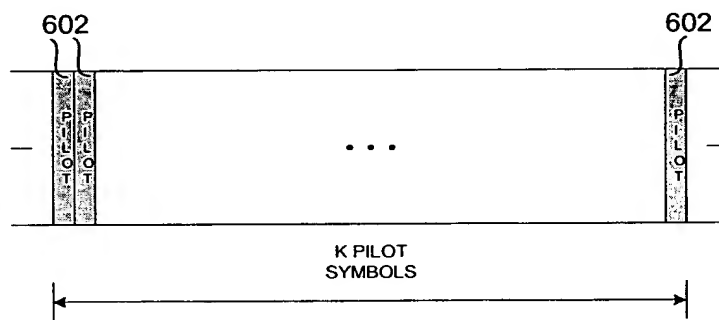


FIG. 6

600

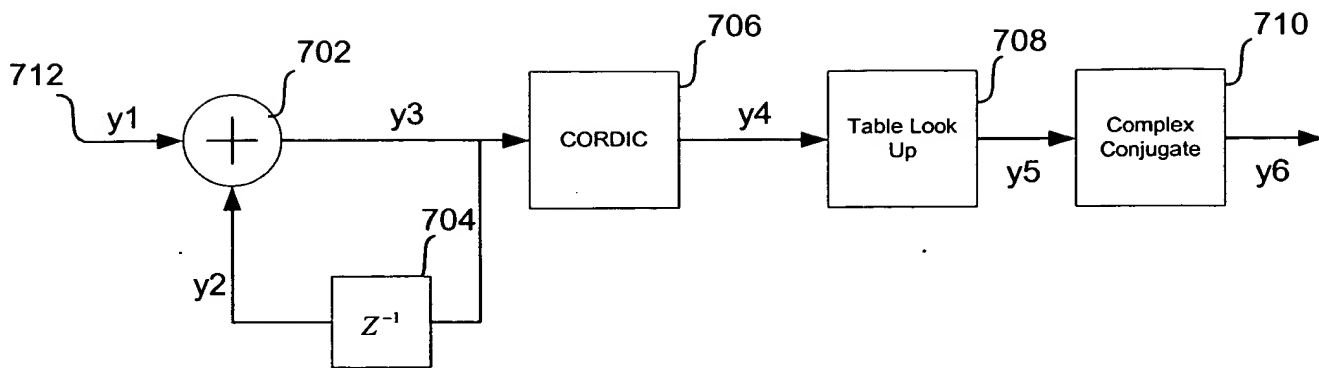

700

FIG. 7